


Uranus series

Smart Interactive Stable Floor Screen


Product Introduction

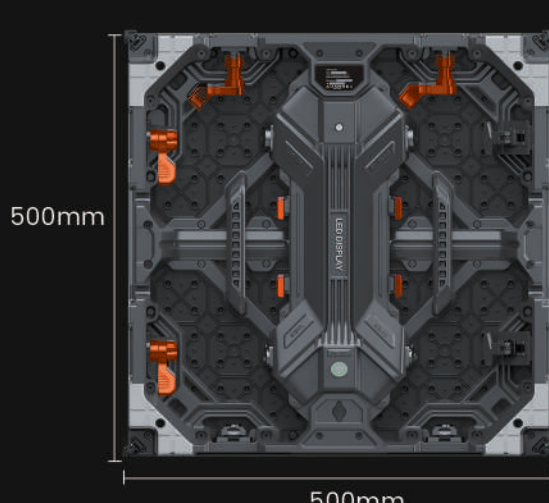

Features

1. Strong Load-Bearing Capacity

The die-casting cabinet is mounted with compression-resistant frames, bearing 2000-3000kg/m².

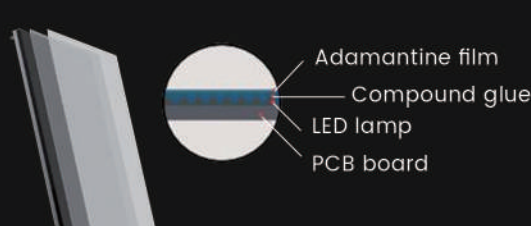


2. CPD Pressing Technology

COD technology brings the modules with matte black, good mask uniformity, strong wear resistance and high strength. COD technology enables the modules to work in harsh weather conditions.

3. 360° Viewing Angle

The audience around the floor screens can enjoy a fabulous visual experience.

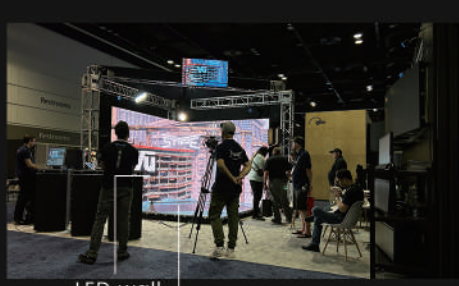


LED wall
LED floor

4. Multiple Applications

Available for both LED wall and LED floor, cater to the needs of rental full-scene applications, greatly enhancing investment ROI.

5. Smart Interaction


Self-developed interaction system with laser sensors and MCU chips, achieving faster non-contact interaction.

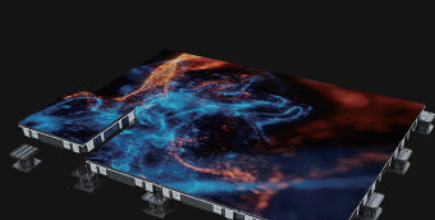

6. Quick Installation

The customized foot with adjustable height is placed under the cabinets for quick installation. Optional customized rail for better installation experience.

Applications

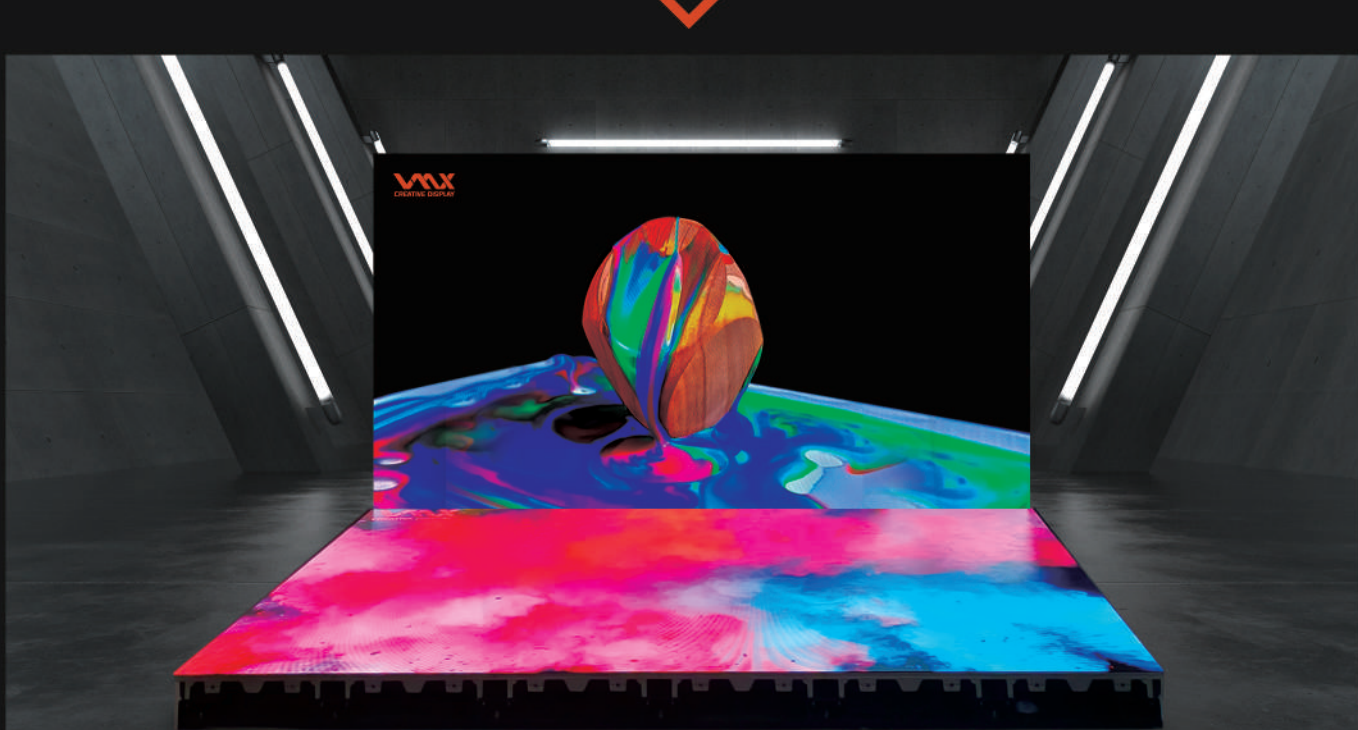

- Live Music
- Concerts
- Corporate Event
- Public Event
- E-sports
- Exhibition

Specifications

Uranus	LED Type	Pixel Pitch	Max. Brightness	Cabinet Material	Cabinet Dimensions (LxWxD)	Cabinet Resolution (HxV)	Weight Per Cabinet	Gray Scale	Refresh Rate	Viewing Angle(H/V)	IP Rating	Certificate
Indoor	UN-151 (CPD)	SMD1010	156mm	1000nit	Die Casting Aluminum 500x500x82mm 19.69x19.69x3.23'	320x320	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP31	CE CCC FCC
	UN-191 (CPD)	SMD1212	195mm	1000nit		256x256	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP31	
	UN-251 (CPD)	SMD1515	2.5mm	1000nit		200x200	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP31	
	UN-261 (CPD)	SMD1515	2.6mm	1000nit		192x192	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP31	
Outdoor	UN-290	SMD1415	2.97mm	2800nit	Die Casting Aluminum 500x500x82mm 19.69x19.69x3.23'	168x168	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP54	CE CCC FCC
	UN-390	SMD1921	3.91mm	2800nit		128x128	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP54	
	UN-620	SMD1921	6.25mm	2800nit		80x80	11.5 Kg/25.35 lbs.	14bit	3840/7680Hz	140°/140°	IP54	

