




Venus Lite Series

Focus on Your Rental Experience

Product Introduction

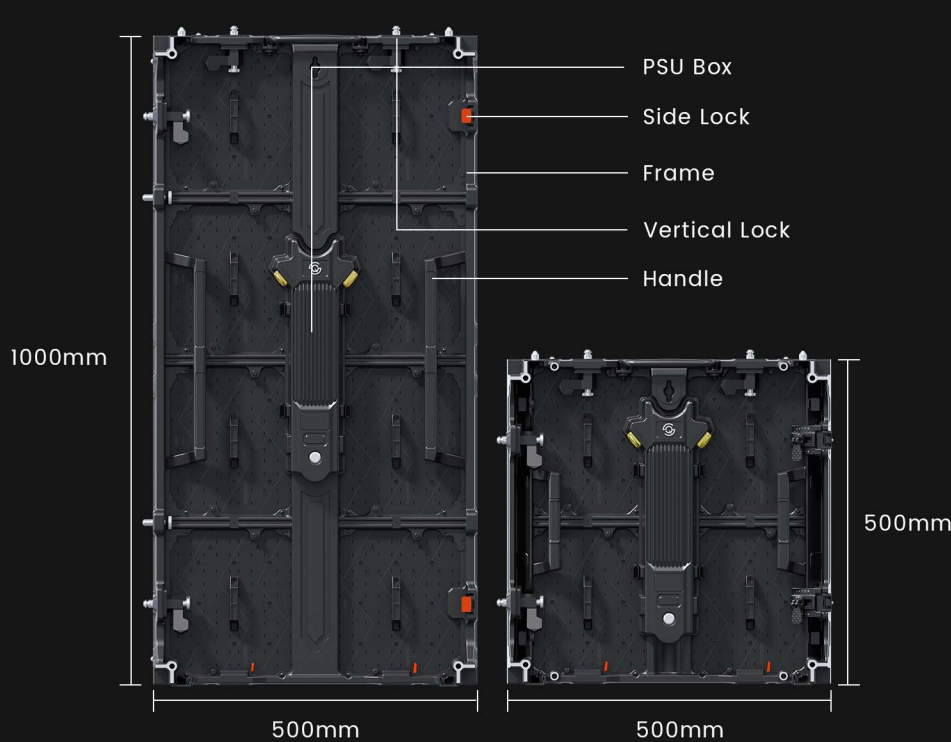

Features





Die Casting Aluminum

1.Light weight design

Adopting die casting aluminum, VN-Lite Series offers a stronger structure with less weight. Available for one man operation, saving cost of transportation and labor. Ideal for large touring and indoor events.

2.Easy & quick maintenance

Highly integrated design allows less PSU connectors and more stabilities, reducing maintenance difficulty, and making operation much easier.




3.Mixed splice

Supporting mixed splice between curved and straight edge cabinet. Different cabinet sizes can be easily spliced up and down, achieving versatile shapes at the event site.

4.Modular design

Adopting modular design allows for the effortless disassembly of the power box and module, facilitating convenient on-site maintenance procedures.

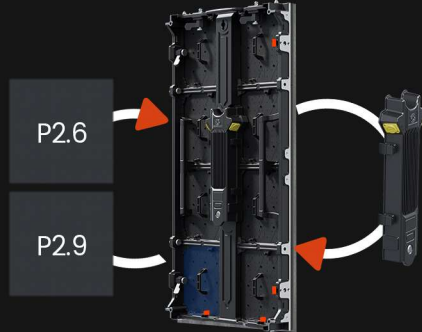


5.Platform design

Adhere to the Venus Series, the universal cabinet and PSU design accommodate different sizes and pixel pitches, streamlining accessory management.

6. Clear and high-quality display

Refresh rate of up to 7680Hz, which enhances visual quality by minimizing visible scan-lines, resulting in the display of smooth and intricate images.

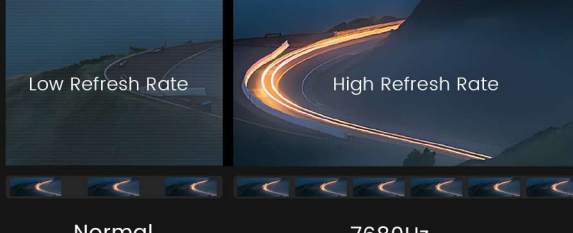

Applications



Public Event



Live Music




Auto Show



Esports



Broadcast

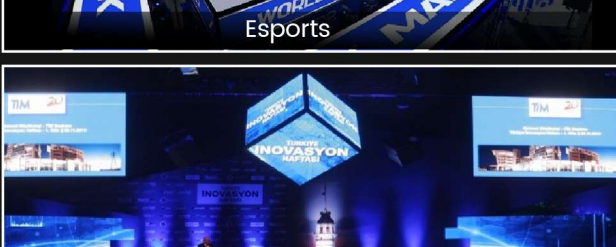

Corporate Event

Specifications

VN-Lite series

	LED Type	Pixel Pitch	Max. Brightness	Cabinet Material	Cabinet Dimensions (LxWxD)	Cabinet Resolution (HxV)	Weight Per Cabinet	Gray Scale	Refresh Rate	Viewing Angle(H/V)	IP Rating (Front/Rear)	
Outdoor	VL-390	SMD1921	3.91mm	4000nit	Die Casting Aluminum	500x500 / 1000x78mm / 19.69x19.69 / 39.37x3.07	128x256	8 Kg / 17.63 lbs.	14bit	3840Hz	140° / 140°	IP65 / IP65
	VL-480	SMD1921	4.81mm	4000nit	Die Casting Aluminum	500x500 / 1000x78mm / 19.69x19.69 / 39.37x3.07	104x208	8 Kg / 17.63 lbs.	14bit	3840Hz	140° / 140°	IP65 / IP65
Indoor	VL-261	SMD1415	2.6mm	800nit	Die Casting Aluminum	500x500 / 1000x78mm / 19.69x19.69 / 39.37x3.07	192x192 / 384	12.5Kg / 27.55 lbs.	14bit	3840Hz	140° / 140°	IP21 / IP21
	VL-291	SMD2020	2.91mm	900nit	Die Casting Aluminum	500x500 / 1000x78mm / 19.69x19.69 / 39.37x3.07	168x168 / 336	12.5Kg / 27.55 lbs.	14bit	3840Hz	140° / 140°	IP21 / IP21
	VL-391	SMD2020	3.91mm	900nit	Die Casting Aluminum	500x500 / 1000x78mm / 19.69x19.69 / 39.37x3.07	128x256	12.5Kg / 27.55 lbs.	14bit	3840Hz	140° / 140°	IP21 / IP21

